

SZK 19" Cabinets


DESCRIPTION:

Cabinets for assembly on SK1 channel sump.

- Made of sheet metal with Magnelis coating 1.5mm thick, plinth made of sheet metal with a Magnelis coating 2 mm thick, 150 mm high, ventilation holes from three sides, covered with a filter mat,
- IP54 category and mechanical resistance IK10 ratings (confirmed by test report No. B/2020/34),
- Lockable with a 3-point bolt lock with a padlock bolt, swing handle,
- 2 pairs of 19" rack - adjustable distance between the front and rear pair from 260 mm to 430 mm, distance between the front of the body and the first pair of racks from 56mm to 174mm.

Additional equipment:

- Heating set with thermostat,
- Heating set consisting of a CSL028 250W semiconductor blower controlled by an electronic hygrotherm ETF 012,
- A set for ventilation of cabinet with a thermostat,
- Floor plate with 3 holes Ø50 for self-breaking,
- 19" 1U 340 mm shelf,
- PS 19" 1U SC SX / DX pull-out,
- PS 19" 2U SC DX pull-out,
- 3U voltage distribution panel.

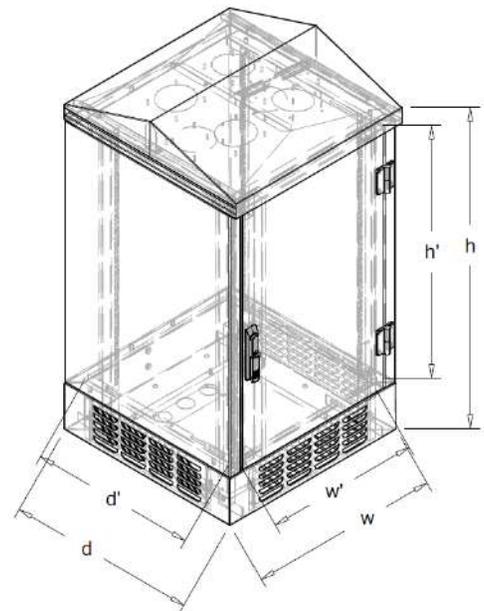

outdoor

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
SZK 12U 19"	864	610	610	531	496	428
SZK 18U 19"	1134	610	610	799	496	429
SZK 24U 19"	1420	610	610	1086	496	425
SZK 30U 19"	1686	610	610	1352	496	425
SZK 42U 19"*	2220	610	610	1883	496	425



SZK-18U 19"