


## Armored Cabinet

### DESCRIPTION:

Designed for wall mounting in places particularly exposed to devastation and burglary,

- Material: steel sheet thickness 2 mm.,
- Closing in SP-19" 6U by one safe lock or in SP-19" 9U and SP-19" 15U: 2 safe locks (with IMP certificate, high security according to PN-ENV 1300: 2002),
- Side wall embossing for gravity ventilation,
- Cabinet allows installation of devices in 19" rack mounts,
- Possibility of cable entries from above and below, e.g. SP-19" 9U has 4 cables entries (Ø38 - plugged),
- Usable distance from door to 110mm rack holders,
- Possibility order with other dimensions, any number and arrangement blind holes (Ø29, Ø38, Ø48), or rectangular holes.

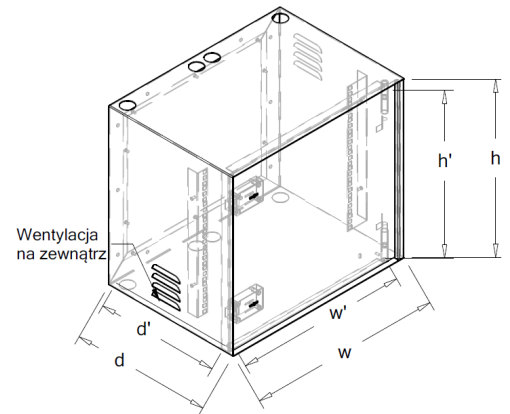

indoor

### Additional equipment:

- 3U voltage distribution panel,
- PS 19" 1U SC SX/DX,
- 19" 1U shelf depth 260mm or 19" 1U shelf depth 340mm
- PSN 1

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
<b>SP 19" 6U gł.600</b>	350	550	600	316	485	585
<b>SP 19" 9U gł.400</b>	500	550	400	466	485	385
<b>SP 19" 9U gł.600</b>	500	550	600	466	485	585
<b>SP 19" 15U gł.400</b>	720	550	400	686	485	385
<b>SP 19" 15U gł.650</b>	720	550	650	686	485	635



**SP-19" 9U**