


## Fiber-Optic Distribution Box - 60J or 96J

**DESCRIPTION:**

Two-access cabinet (operator part separated from the client switching panel), equipped with a double door system.

- Material: sheet steel 1mm thick,
- Closing by 2 cylinder locks with one or two different key code,
- Standard commutation field has 48 holes for fiber optic adapters type SC DX (96J) or in the second version 60 holes for SC SX fiber optic adapters (60J),
- Organizational handles for easy stacking of cable stocks,
- Extended client part with the possibility of making welds on mounted trays,
- It has 3 blind holes to knock out Ø29 / 38 on the top and bottom of the cabinet.

On request it is possible to make other cable holes and holes for fiber optic adapters.

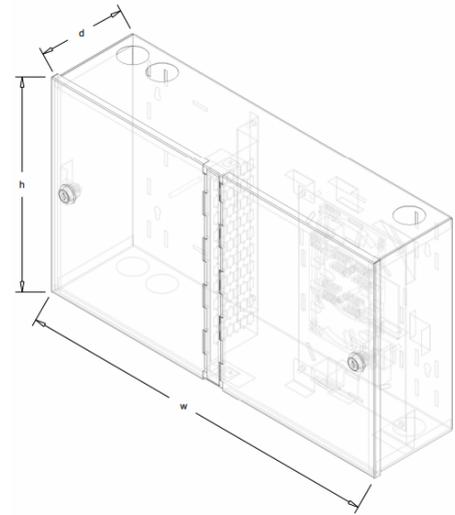

indoor

| Symbol                  | external dimensions (mm) |       |       |
|-------------------------|--------------------------|-------|-------|
|                         | height                   | width | depth |
| <b>SRS-30/53/13 60J</b> | 304                      | 529,2 | 131   |
| <b>SRS-30/53/13 96J</b> | 304                      | 529,2 | 131   |



**SRS 30/53/13 96J**