

SZK modular Cabinets


DESCRIPTION:

Cabinets for assembly on SK1 channel sump.

- Made of sheet metal with Magnelis coating 1.5mm thick, plinth made of sheet metal with a Magnelis coating 2 mm thick, 150 mm high, ventilation holes from three sides, covered with a filter mat,
- IP54 category and mechanical resistance IK10 ratings (confirmed by test report No. B/2020/34),
- Upper and lower part connected with a 150mm high grommet,
- Lockable with a 3-point bolt lock with a padlock bolt, swing handle,
- 2 pairs of 19" rack - adjustable distance between the front and rear pair from 260mm do 420mm, distance between the front of the body and the first pair of racks from 55mm do 125mm,

Additional equipment:

- Heating set with thermostat,
- Heating set consisting of a CSL028 250W semiconductor blower controlled by an electronic hygrotherapy ETF 012,
- A set for ventilation of cabinets with a thermostat,
- Floor plate with 3 holes Ø50 for self-breaking,
- 19" 1U 340 mm shelf,
- PS 19" 1U SC SX / DX pull-out,
- PS 19" 2U SC DX pull-out,
- 3U voltage distribution panel.

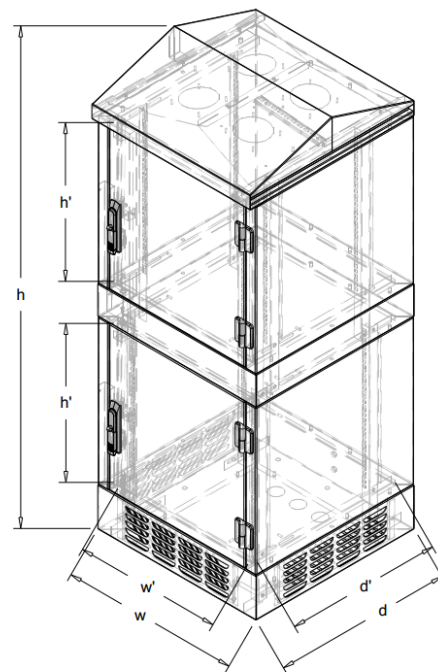

outdoor

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
SZK 24U 19" (12U+12U)	1535	610	610	533+533	503	570
SZK 30U 19" (18U+12U)	1805	610	610	533+803	503	570
SZK 36U 19" (18U+18U)	2075	610	610	803+803	503	570



SZK-36U (18U+18U)