


Outdoor Fiber Optic Distribution Frame - 12J

DESCRIPTION:

Outdoor cabinet designed for FTTh networks where a simple construction allows for any arrangement of optical fibers.




- Body made of sheet metal with Magnelis coating 1mm thick,
- IP65 category and mechanical resistance IK10,
- In the upper part of the cabinet there is a separate space for supplying the source cable, together with the field for the 2J signal source and the tray of welds,
- The upper part of the door has space for optical splitter and metal holder for storage,
- In the bottom part of the door, a commutation field with a capacity of 12J (12 holes for SC SX adapters) with a place for a 12J splice tray,
- Cable entry plugged with a multi-hole gland,
- Door closed with 2 airtight cylinder locks (dedicated key code),
- Poured polyurethane gasket on the door,
- Removable panels allow for convenient welding at a distance from the cabinet,
- Cabinet designed for wall mounting.

On request, cabinet can be made in Duplex version.

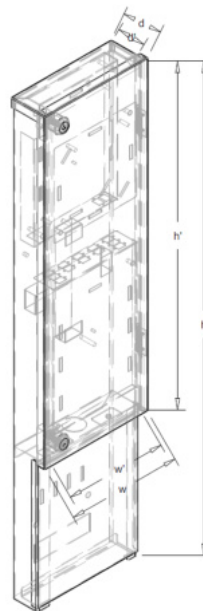

outdoor

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
RSZ-79/18/6 12J	793	188	65	544	165	57

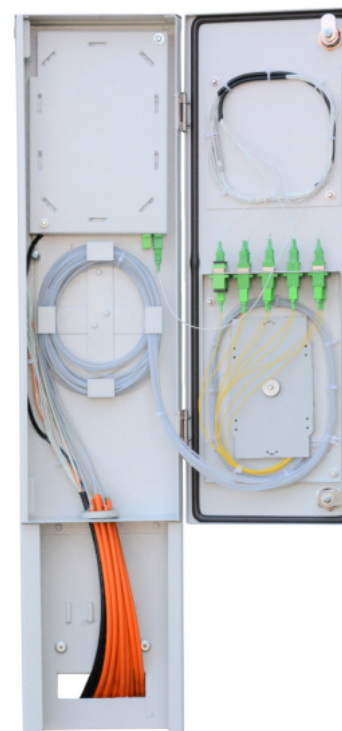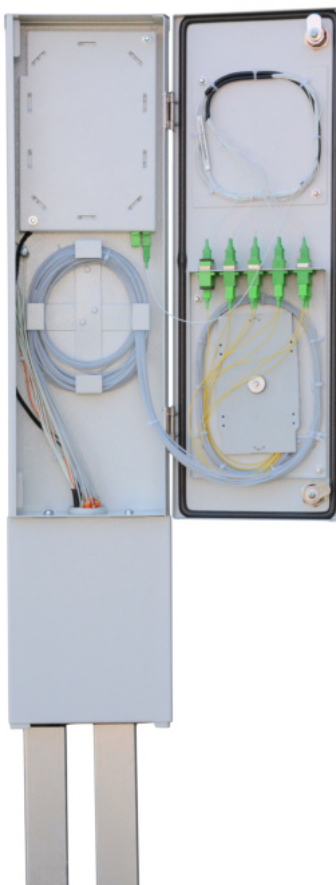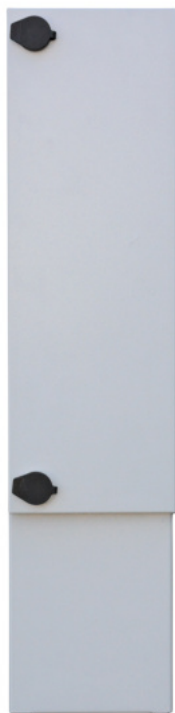

RSZ-79/18/6 - 12J