


## Outdoor Fiber-optic Switch board - 36J

**DESCRIPTION:**

Outdoor cabinet designed for FTTh networks where a simple construction allows for any arrangement of optical fibers.

- Body and pedestal made of sheet metal with a Magnelis coating, 1.5mm thick, the pedestal designed for mounting by digging into the ground to a depth of 60cm,
- In the upper part of the cabinet two specially profiled inserts designed for mounting optical network elements such as adapters, splice trays,
- Insert in the operator part with a capacity of 6J (6 holes for SC Simplex adapters) and a client with a capacity of 36J (36 holes for SC Simplex adapters),
- Inserts with the possibility of tilting and complete disassembly facilitate the work,
- Insert mounting brackets on the back wall also act as cable / coil holders,
- Door closed with one hermetic cylinder lock (dedicated key code),
- Completely disassembled door with poured polyurethane gasket and sealing plate at the bottom of the post ensure the upper part of the cabinet IP65 tightness
- 2 separate inputs blinded by airtight glands and 2 holes dedicated for the cable input, sealed with multigate grommet,
- The ground part of the cabinet after mounting the pedestal is 100cm.

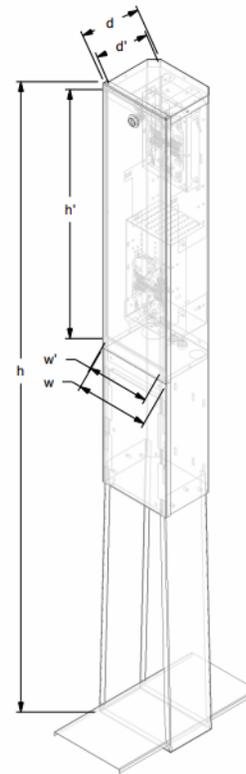

outdoor

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
<b>RSZ-160/18/14 36J</b>	1593	185	148,1	626	160	140



**RSZ-160-18-14 36J**