


## Fiber-Optic Distribution Box - 48J

**DESCRIPTION:**

Two-access cabinet (operator part separated from the client switching panel), equipped with a double door system.

- Material: sheet steel 1mm thick,
- Closing by 2 cylinder locks with one or two different key code,
- As a standard, the commutation field has 24 holes for SC fiber optic adapters,
- Possibility to connect cables coming from the telecommunications center to the building, vertical and line cables,
- Possibility of mounting optical couplers (splitters) and trays for optical fiber splices,
- It has 3 blind holes to knock out Ø29/38 on the top and bottom of the cabinet,
- The cabinet has a cable organizer (cable stock) in the operator's part.

On request it is possible to make other cable holes and holes for fiber optic adapters.

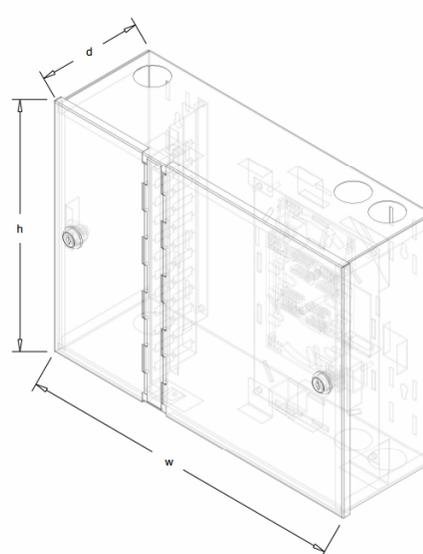

indoor

Symbol	external dimensions (mm)		
	height	width	depth
<b>SRS-30/40/13 48J</b>	304	406,4	131



**SRS 30/40/13 48J DX**