

## SZK Cabinet with thermal isolation


**DESCRIPTION:**

Cabinets for assembly on SK1 channel sump.

- Made of sheet metal with Magnelis coating 1.5mm thick, plinth made of sheet metal with a Magnelis coating 2 mm thick, 150 mm high, ventilation holes from three sides, covered with a filter mat,
- IP54 category and mechanical resistance IK10 ratings,
- Lockable with a 3-point bolt lock with a padlock bolt, swing handle,
- 2 pairs of 19" rack handles as standard, mounted vertically along the entire depth of the cabinet,
- Cabinet isolated with Aluthermo Quattro foil with a permeability of  $\lambda$  0,040 W/m.

**Additional equipment:**

- Heating set with thermostat,
- Heating set consisting of a CSL028 250W semiconductor blower controlled by an electronic hygrotherm ETF 012,
- A set for ventilation of cabinet with a thermostat,
- Floor plate with 3 holes  $\varnothing$ 50 for self-breaking,
- 19" 1U 340 mm shelf,
- PS 19" 1U SC SX / DX pull-out,
- PS 19" 2U SC DX pull-out,
- 3U voltage distribution panel.

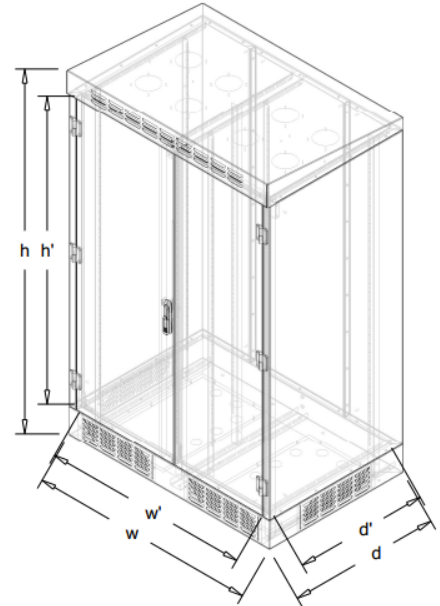

outdoor

Symbol	External dimensions (mm)			Internal dimensions (mm)		
	height (h)	width (w)	depth (d)	height (h')	width (w')	depth (d')
<b>SZK 36U 192/120/80*</b>	1904	1200	814	1601	1091	726



**SZK 36U 192/120/80**